

Makes every trip an
experience in comfort.



Presenting the Starbus 40-Seater.
Unmatched urban transportation.

Now you don't have to face the stress and strain of travel in the city.

The Starbus 40-Seater makes sure every trip is a comfortable one.

Thanks to its superior design and state-of-the-art body building technology.


Reliability | Durability | Best Design & Aesthetics | Superior Passenger Comfort

Features: Designed & manufactured at the fully automated manufacturing & assembly plant of Tata Motors Marcopolo Ltd. at Dharwad, Karnataka • Built on the proven & reliable Tata LP 912 platform • 4900 mm wheelbase ensures more passenger carrying capacity • Smart, contemporary looks • Backed by the widest & best after sales service & spares network in India

Starbus 40-Seater is designed for

- Corporate – employee transportation
- Transportation for BPO employees
- **Also available in school variant**, with all comfort & safety features (40-Seater)
- Tour & Travel – intra-city operations
- Feeder service – to and fro transportation from pick-up points

Model Name	Starbus 40*	
	BS III	BS IV
Emission	BS III	BS IV
Chassis Platform	LP 912 / 49 BS III Diesel; 40-Seater	LP 912 / 49 BS IV Diesel; 40-Seater
Engine	Tata 497 Turbo-charged, Inter-cooled, 3783 cc	Tata 497 TCIC, Water-cooled, Common Rail
Engine Power	92 Kw (123 HP) @ 2400 rpm	92 Kw (123 HP) @ 2400 rpm
Engine Torque	400 Nm @ 1300-1500 rpm	400 Nm @ 1300-1500 rpm
Clutch	310 mm Dry Single Plate	310 mm Dry Single Plate
Gear Box	GBS-40; 5 forward + 1 reverse	GBS-550; 6 forward + 1 reverse
Suspension	Semi-elliptical leaf spring; Hydraulic double acting telescopic shock absorber; Anti-roll bar (front & rear)	Semi-elliptical leaf spring; Hydraulic double acting telescopic shock absorber; Anti-roll bar (front & rear)
Steering	Power Steering	Power Steering
Tyres	8.25 x 16 - 16 PR	8.25 x 16 - 16 PR
Fuel Tank Capacity (litres)	160 litres	160 litres
Turning Circle Diameter (m)	17.5	17.5
Maximum GVW (kg)	9000	9000
Electricals	12 Volts, 150 Ah; Alternator: 65 Amps	12 Volts, 120 Ah; Alternator: 65 Amps
BODY:		
Seating Capacity & Layout	40 + 1, 2x2	
Structure	Galvanized tubular structure	
Floor	Anti-skid vinyl	
Passenger Door	1 jack knife type	
Front Windshield	Single piece laminated glass	
Rear Windshield	Single piece tempered glass	
Emergency Exits	Rear of bus, breakable rear glass with hammer	
Side Windows	Sliding glasses	
Roof Lamps	2 red rear & 2 white front	
Step Lamp	Yes	
Fire Extinguisher	1 no. of 2 kg capacity	
Hatrack	Tubular hatrack / Modular in AC option	
Window Guardrail	Four rows	
Bell Switch	1 no. on stanchion pipe	
Emergency Alarm	Yes	
Fire Retardent Material	For all interior material used in the bus	
Side Luggage Booth	Yes	
Air-conditioner	Optional, Engine-driven 17.8 - 20 Kw	
Overall Dimensions:		
Wheelbase (mm)	4920	
Length (mm)	9302	
Overall Height (mm)	2870	
Max. Width (mm)	2200	
Internal Height (mm)	1900	

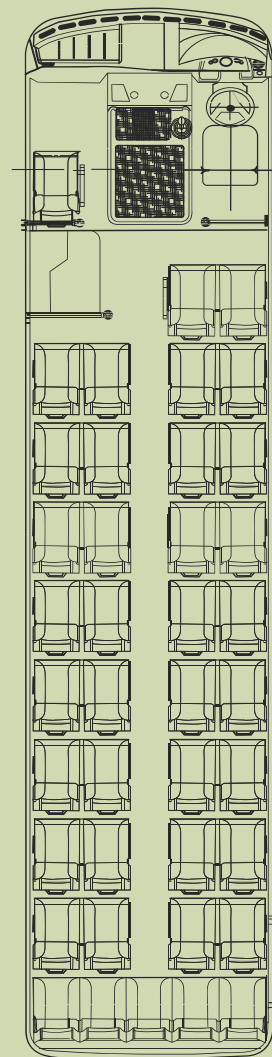

TATA
Starbus

*Also available in AC option.

TATA MOTORS

For more information, please visit our website: www.buses.tatamotors.com
You can also contact our Sales Office: 20th Floor, Tower 2, One Indiabulls Centre, 841 Senapati Bapat marg, Mumbai 400 013. Tel.: +91 22 66586000 Fax: +91 22 66586010. Email: businfo@tatamotors.com

The illustrations and photographs may show accessories and items of optional equipment which are not part of standard specifications. Due to printing processes, colours may vary slightly from those shown. All listed specifications are current and subject to change or upgrades without prior notice, in accordance with the Company's policy of continuous product improvement.