

Presenting Prima LX 4023.S

— The latest offering from the world of Prima ——




Trucks | Tractor-Trailers | Tippers


TATA MOTORS


With the LX range, we bring you a perfectly balanced drivetrain

- Proven Cummins ISBe engine that delivers plenty of power along with greater efficiency the perfect combination to increase your returns
- Larger clutch in line with a heavier driveline, for increased clutch life & better performance
- Tata G 1150 OD gearbox with 9-speed ranges and overdrive, helps you stay in the optimal rpm range and reduces fuel expenses
- Heavy duty single reduction rear axle, to complete a truly optimal drivetrain

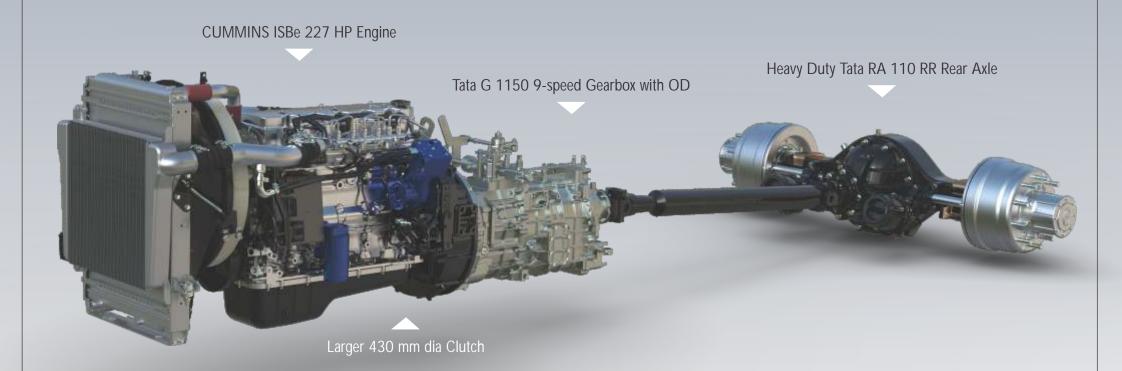

Heavier drivetrain: better performance, higher profitability



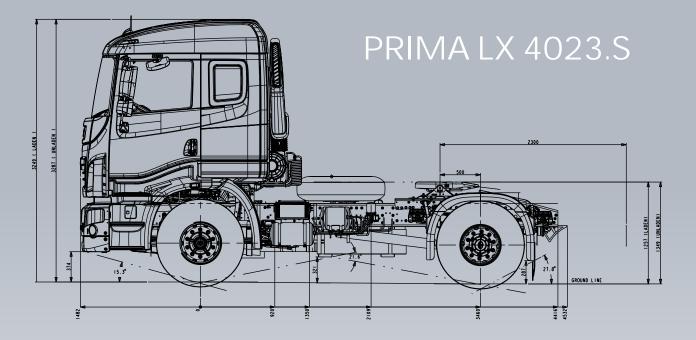

| Engine | | |
|-----------|---|--|
| Model | CUMMINS ISBe 6.7 BS III | |
| Туре | Water-cooled Direct Injection Turbo-charged, After-cooled Diesel Engine; 6 Inline | |
| Volume | 6700 cc | |
| Power | 227 HP @ 2500 rpm | |
| Torque | 870 Nm @ 1700 rpm | |
| Clutch | | |
| Туре | Single Disc, Dry Friction Type | |
| Dia | 430 mm | |
| Gearbox | Tata G 1150 OD 9-speed, Forward Synchromesh & Rear Constantmesh | |
| Rear Axle | RA 110 RR with RAR 5.85 | |
| Rims | 7.50 x 20 | |
| Tyres | 10.00 R 20 - 16 PR | |
| Fuel Tank | 400 litres | |

| Electrical | 24 V |
|---------------------|------------------------|
| Options | Prima LX Sleeper Cabin |
| AC | Optional |
| Performance | |
| Max. Speed | 100 kmph |
| Max. Gradeability | 16% |
| Weight & Dimensions | |
| GVW (kg) | 40200 |
| ULW (kg) | 6831 |
| Wheelbase (mm) | 3460 |
| Overall Length (mm) | 6133 |
| | |

Technical Specifications



For more information, please visit our website: www.tataprima.com. You can also contact our Sales Office: Tata Motors Limited, 20th Floor, Tower 2, One Indiabulls Centre, 841, Senapati Bapat Marg, Mumbai 400 013. Tel: 91 22 6658 6000; Fax: 91 22 6658 6010.

The illustrations and photographs may show accessories and items of optional equipment which are not part of standard specifications. Due to printing processes, colours may vary slightly from those shown. All listed specifications are current and subject to change or upgrades without prior notice, in accordance with the Company's policy of continuous improvement.